

# Product Environmental Profile

## Double Socket Outlet Side Earth Shut Screw






## General information

Representative product	Double Socket Outlet Side Earth Shut Screw - SDD311221
Description of the product	The main purpose of this socket outlet is to allow users to connect and disconnect the plug of an electrical load or the source of a signal from a network.
Functional unit	Connect/Disconnect during 20 years the plug of a load consuming 16A under a voltage of 250V while protecting the user from direct contact with live parts and with a protection class IP20.



## Constituent materials

Reference product mass	113 g including the product, its packaging and additional elements and accessories
------------------------	--

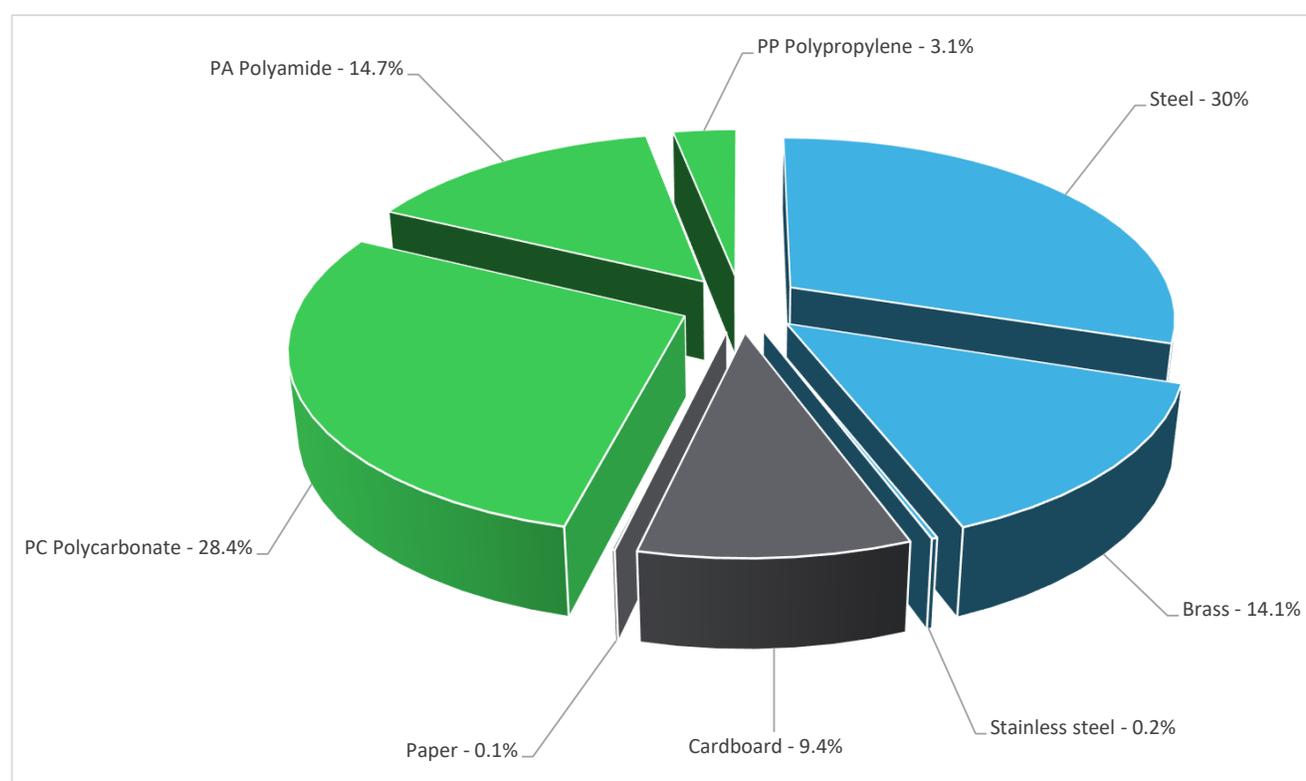

Plastics	46.2%
Metals	44.3%
Others	9.5%



## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

## Additional environmental information


The Double Socket Outlet Side Earth Shut Screw presents the following relevant environmental aspects

<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 14.2 g, consisting of Cardboard (74.8%), Plastic (24.8%) & Paper (0.4%) Product distribution optimised by setting up local distribution centres
<b>Installation</b>	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.  Recyclability potential: <b>44%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

## Environmental impacts

<b>Reference life time</b>	20 years			
<b>Product category</b>	Power socket			
<b>Installation elements</b>	End of life of the packaging materials			
<b>Use scenario</b>	Product dissipation is 0.319W at 100% Load rate and 0.1595 W at load rate / rated current (In): 50 % of In & percentage of utilization time: 50%			
<b>Geographical representativeness</b>	Europe			
<b>Technological representativeness</b>	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Manufacturing Plant: ELDA Poland	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU- 27

Compulsory indicators		Double Socket Outlet Side Earth Shut Screw - SDD311221					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	5.47E-05	5.43E-05	0*	0*	3.76E-07	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	6.43E-02	1.81E-03	6.66E-05	0*	6.24E-02	3.01E-05
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	4.06E-03	1.69E-03	1.53E-05	1.95E-06	2.34E-03	8.57E-06
Contribution to global warming	kg CO <sub>2</sub> eq	9.02E+00	7.36E-01	1.46E-02	9.30E-04	8.25E+00	1.67E-02
Contribution to ozone layer depletion	kg CFC11 eq	2.11E-06	1.08E-07	0*	0*	2.00E-06	6.89E-10
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	3.12E-03	1.65E-04	4.75E-06	0*	2.95E-03	3.12E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	3.32E-02	1.16E-02	0*	0*	2.15E-02	1.39E-05
Total Primary Energy	MJ	1.81E+02	1.30E+01	2.06E-01	0*	1.67E+02	1.45E-01

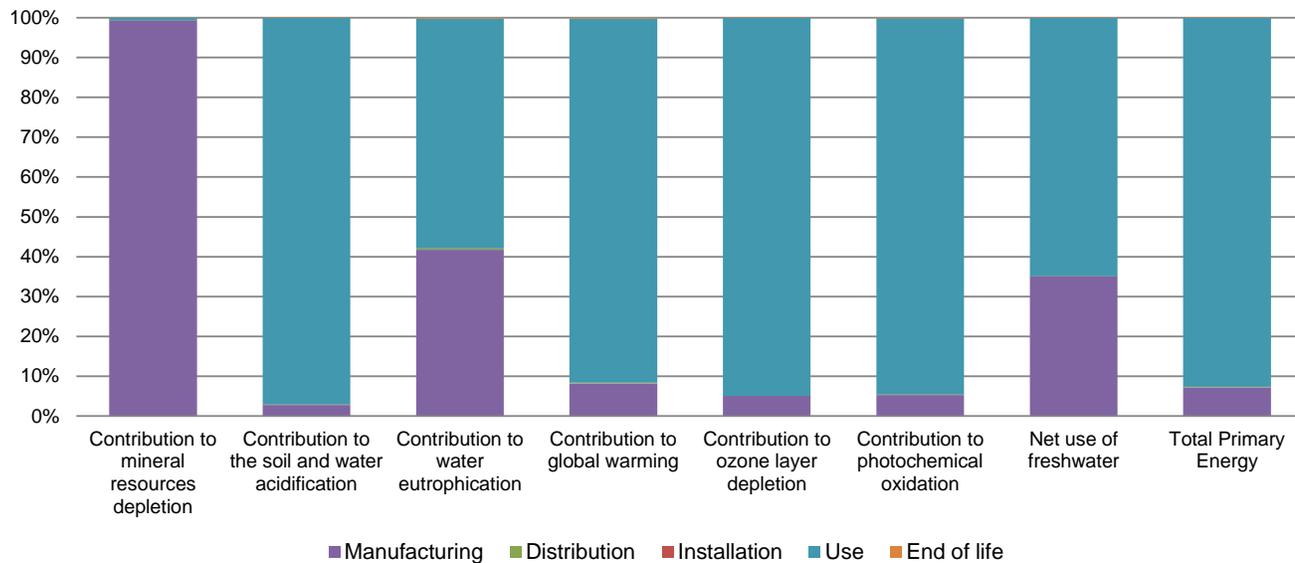

Optional indicators		Double Socket Outlet Side Earth Shut Screw - SDD311221					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	9.40E+01	8.70E+00	2.05E-01	1.11E-02	8.50E+01	1.17E-01
Contribution to air pollution	m³	5.19E+02	1.63E+02	6.20E-01	6.09E-02	3.54E+02	1.06E+00
Contribution to water pollution	m³	4.42E+02	9.17E+01	2.40E+00	1.30E-01	3.46E+02	1.29E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1.63E-02	1.63E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.22E+01	2.09E-01	0*	0*	1.20E+01	0*
Total use of non-renewable primary energy resources	MJ	1.68E+02	1.28E+01	2.06E-01	0*	1.55E+02	1.45E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.22E+01	2.09E-01	0*	0*	1.20E+01	0*
Use of renewable primary energy resources used as raw material	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.66E+02	1.09E+01	2.06E-01	0*	1.55E+02	1.45E-01
Use of non renewable primary energy resources used as raw material	MJ	1.88E+00	1.88E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	4.39E+00	4.24E+00	0*	0*	0*	1.55E-01
Non hazardous waste disposed	kg	3.14E+01	5.03E-01	0*	0*	3.09E+01	0*
Radioactive waste disposed	kg	2.55E-02	3.09E-04	0*	0*	2.52E-02	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	6.06E-02	5.70E-03	0*	1.17E-02	0*	4.33E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2.44E-03	0*	0*	0*	0*	2.44E-03
Exported Energy	MJ	3.38E-05	3.18E-06	0*	3.06E-05	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

*Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.*

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

The Manufacturing phase is impacting on Indicator of Abiotic depletion (elements, ultimate ultimate reserves) (ADPe). The Manufacturing phase & Use phase are impacting equally on Indicators Eutrophication (fate not incl.) (EP) & Net use of freshwater (NUFW). And the Use phase impacting on the rest of the Indicators.

*Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.*

<i>Registration number</i>	ENVPEP2008002_V1-EN	<i>Drafting rules</i>	PCR-ed3-EN-2015 04 02
<i>Date of issue</i>	08/2020	<i>Supplemented by</i>	PSR-0005-ed2-EN-2016 03 29
<i>Validity period</i>	5 years	<i>Information and reference documents</i>	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92506 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

ENVPEP2008002\_V1-EN

© 2019 - Schneider Electric – All rights reserved

08/2020