


Product Environmental Profile

Acti9 - iC60 - Miniature circuit breaker






General information

Representative product	Acti9 - iC60 - Miniature circuit breaker - A9F74216
Description of the product	iC60 circuit breakers ensure the protection of the electrical installation against overloads and short-circuits
Functional unit	Protect during 20 years the installation against overloads and short-circuits in circuit with assigned voltage 400V and rated current 16A. This protection is ensured in accordance with the following parameters: <ul style="list-style-type: none"> - Number of poles 2P - Rated breaking capacity 6000A - Tripping curve C



Constituent materials

Reference product mass 231.9g including the product, its packaging and additional elements and accessories

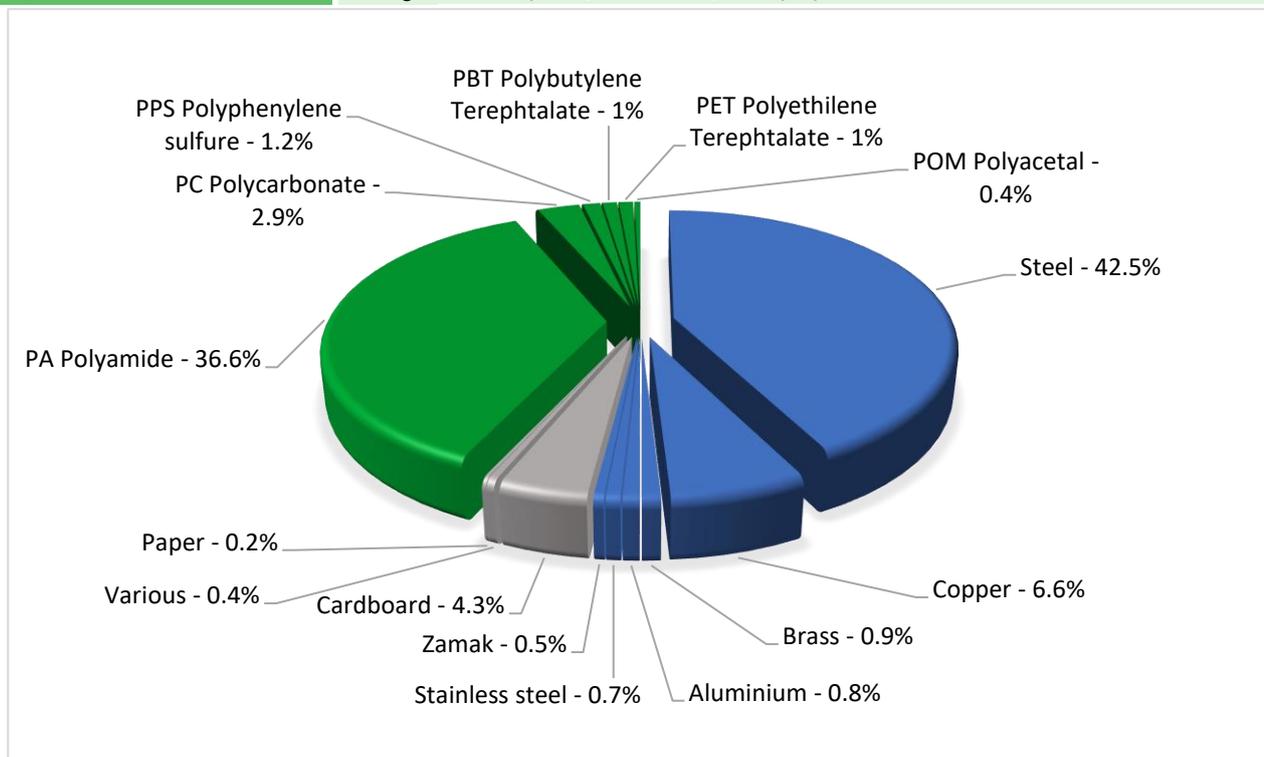

Plastics	43,1%
Metals	52,0%
Others	4,9%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive.

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The Acti9 - iC60 - Miniature circuit breaker - A9F74216 presents the following relevant environmental aspects


Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified		
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 10.8 g, consisting of cardboard (94.83%), paper (5.17%)		
Installation	Reference A9F74216 does not require any installation operations.		
Use	The product does not require special maintenance operations.		
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.		
	Recyclability potential:	51%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



Environmental impacts

Reference life time	20 years			
Product category	Circuit-breakers			
Installation elements	No special components needed			
Use scenario	Load rate: 50% of In Use time rate: 30% of RL			
Geographical representativeness	Europe			
Technological representativeness	iC60 circuit breakers are multi-standard circuit breakers which protect against short-circuit and overload currents.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: France	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		Acti9 - iC60 - Miniature circuit breaker - A9F74216					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2,32E-04	2,30E-04	0*	0*	1,29E-06	0*
Contribution to the soil and water acidification	kg SO ₂ eq	6,57E-02	3,74E-03	1,37E-04	0*	6,18E-02	6,82E-05
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	4,83E-03	1,05E-03	3,15E-05	5,93E-07	3,73E-03	1,91E-05
Contribution to global warming	kg CO ₂ eq	1,64E+01	1,49E+00	2,99E-02	0*	1,48E+01	3,64E-02
Contribution to ozone layer depletion	kg CFC11 eq	1,60E-06	6,32E-07	0*	0*	9,65E-07	1,54E-09
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	3,80E-03	3,89E-04	9,75E-06	0*	3,39E-03	7,11E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	5,37E+01	1,49E-02	0*	0*	5,37E+01	0*
Total Primary Energy	MJ	3,14E+02	1,79E+01	4,23E-01	0*	2,96E+02	3,31E-01

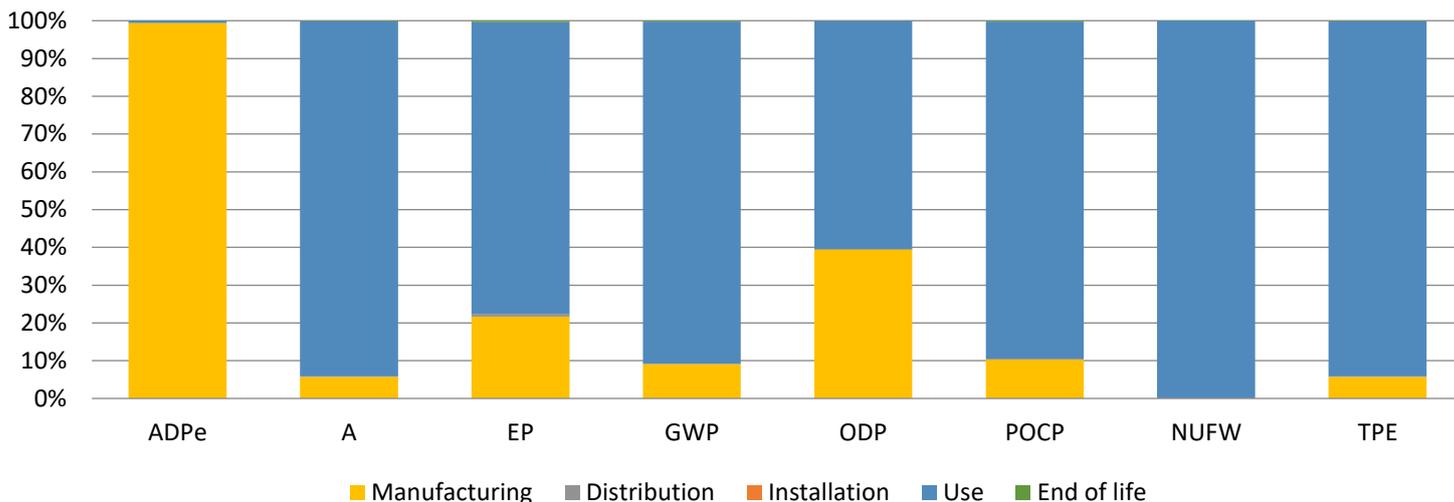

Optional indicators		iC60N 2P 16A C - A9F74216					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1,79E+02	1,02E+01	4,20E-01	0*	1,68E+02	2,66E-01
Contribution to air pollution	m³	9,89E+02	3,48E+02	1,27E+00	0*	6,37E+02	2,40E+00
Contribution to water pollution	m³	1,09E+03	4,75E+02	4,92E+00	0*	6,11E+02	2,90E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1,35E-02	1,35E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	3,80E+01	3,65E-01	0*	0*	3,76E+01	0*
Total use of non-renewable primary energy resources	MJ	2,76E+02	1,75E+01	4,22E-01	0*	2,58E+02	3,31E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3,79E+01	3,25E-01	0*	0*	3,76E+01	0*
Use of renewable primary energy resources used as raw material	MJ	4,01E-02	4,01E-02	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2,74E+02	1,49E+01	4,22E-01	0*	2,58E+02	3,31E-01
Use of non renewable primary energy resources used as raw material	MJ	2,61E+00	2,61E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1,34E+01	1,31E+01	0*	0*	7,72E-03	3,36E-01
Non hazardous waste disposed	kg	5,61E+01	9,31E-01	0*	0*	5,52E+01	0*
Radioactive waste disposed	kg	3,74E-02	5,41E-04	0*	0*	3,69E-02	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1,51E-01	2,34E-02	0*	1,08E-02	0*	1,17E-01
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	5,01E-03	0*	0*	0*	0*	5,01E-03
Exported Energy	MJ	3,42E-05	3,22E-06	0*	3,10E-05	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00485-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH33	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Date of issue	09/2019	Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	External	X	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)			
PEP are compliant with XP C08-100-1 :2016			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			
			

Schneider Electric Industries SAS

Country Customer Care Center

<http://www.schneider-electric.com/contact>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

SCHN-00485-V01.01-EN

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

09/2019