


The product is wall mounted gas detector with high stability (hereinafter called detector). It is used for detecting leaking gas. Advanced semiconductor sensor is adopted to ensure high stability and long life. It is convenient for mounting. The product is suitable for the safety of residential house, villas, hotels, markets, boarding house etc.

Produkt to montowany na ścianie detektor gazu o wysokiej stabilności (dalej zwany detektorem). Służy do wykrywania wycieku gazu. Zastosowano zaawansowany czujnik półprzewodnikowy, aby zapewnić wysoką stabilność i długą żywotność. Jest wygodny w montażu. Produkt nadaje się do zapewnienia bezpieczeństwa domów mieszkalnych, willi, hoteli, rynków, pensjonatów itp.

## Specyfikacja techniczna

VD703NAC

Napięcie robocze	AC 85-264V (DC12V/24V opcja)
Moc znamionowa	3W (AC 220V)
Czas rozgrzewki	about 180s
Czas reakcji na alarm	≥90s
Poziom alarmu	10%LEL
Głośność alarmu	85dB@3m
Wskaźnik alarmu	migająca czerwona dioda LED
Wskaźnik awarii	żółta dioda LED (świeci i brzęczy)
Wyjście alarmowe	Alarm dźwiękowy i błyskowy Wyj. sygnału zaworu elektromagnetycznego (opcja) Wyjście sygnału przekaźnika (opcja)
Temperatura pracy	-10~+50°C
Wilgotność robocza	≥95% RH (bez kondensacji)

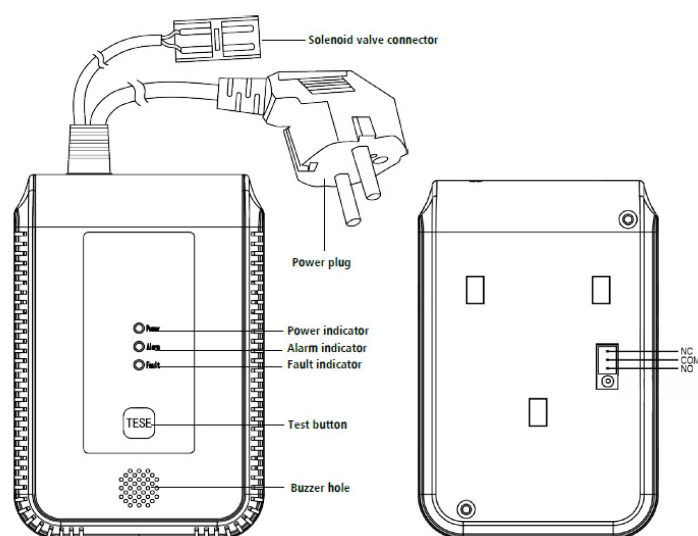

Status detektora (Detector status)	Status wskaźnika (Indicator status)
Czas nagrzewania się (Warm-up inside sensor)	Zielona dioda LED miga co 1 sekundę przez 3 minuty (The green LED flashes every 1 second for 3 minutes)
Status testu (Test status)	Zielona i żółta dioda LED świeci (The green and yellow LEDs are on) Czerwona dioda LED miga szybko (The red LED is flashing rapidly)
Status pracy norma (Normal work status)	Świeci się zielona dioda LED (Green LED on)
Wyciek gazu (Gas leaking)	Czerwona dioda LED świeci (Red LED on)
Błąd czujnika (Sensor fault)	Żółta dioda LED świeci (Yellow LED on)