


PL Oprawa LED typu downlight wpuszczana
 EN Recessed LED downlight
 RU Светодиодный скрытый светильник downlight
 DE Downlight-LED-Leuchte für Einlass-Montage
 HU Süllyesztett LED lámpatest



ORIS



| Folder | Wattage | Color Temperature | Lumen | PF | Material | Weight | Barcode | |
|--------------|---------|-------------------|---------|----------|--|----------|---------------|---------------|
| LD-ORW03W-CB | 3 W | 3000 K | 200 lm | PF > 0,5 | aluminium aluminium алюминий Aluminium aluminium | 150 g | 5902801000768 | |
| LD-ORW03W-NB | | 4000 K | | | | | 5902801000782 | |
| LD-ORW07W-CB | 7 W | 3000 K | 560 lm | | | 220 g | 5901867127594 | |
| LD-ORW07W-NB | | 4000 K | | | | | 5901867158451 | |
| LD-ORW13W-CB | 13 W | 3000 K | 1020 lm | | | 350 g | 5901867127600 | |
| LD-ORW13W-NB | | 4000 K | | | | | 5901867158437 | |
| LD-ORW19W-CB | 19 W | 3000 K | 1520 lm | | | 550 g | 5901867127617 | |
| LD-ORW19W-NB | | 4000 K | | | | | 5901867158413 | |
| LD-ORW25W-CB | 25 W | 3000 K | 2000 lm | | | PF > 0,9 | 880 g | 5901867127624 |
| LD-ORW25W-NB | | 4000 K | | | | | | 5901867158390 |

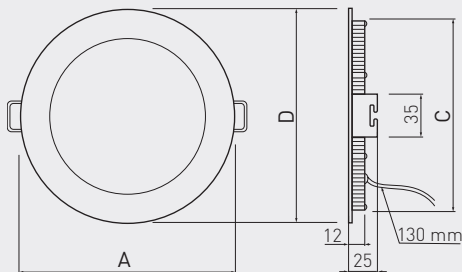

| | A | C | D |
|------|-------|-------|----------|
| 3 W | ø 90 | ø 62 | mx. 112 |
| 7 W | ø 120 | ø 100 | max. 150 |
| 13 W | ø 170 | ø 150 | max. 202 |
| 19 W | ø 225 | ø 200 | max. 255 |
| 25 W | ø 300 | ø 280 | max. 330 |