Product Environmental Profile

Complete Illuminated Plastic Button and Switch







ENVPEP1710010EN_V1 11/2017



Representative product

Complete Illuminated Plastic Button and Switch -XB5AW34B5

Description of the product

Illuminated complete plastic unit with contact function. It combines simplicity of installation, flexibility, and robustness. It meets the requirements of the majority of industrial applications.


Functional unit

Switch ON or OFF during 20 years the 10A electical contact with 50% use rate.

Constituent materials

Reference product mass

56 g including the product, its packaging and additional elements and accessories

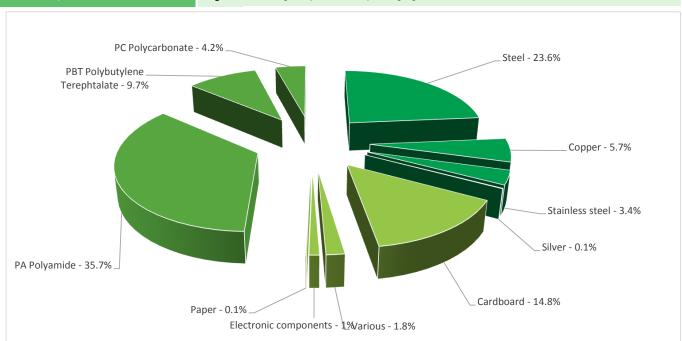

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page

ENVPEP1710010EN V1 11/2017

Additional environmental information

The Complete Illuminated Plastic Button and Switch presents the following relevent environmental aspects								
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified							
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive							
Distribution	Packaging weight is 8.5 g, consisting of cardboard (99.2%), Paper (0.8%)							
Installation	XB5AW34B5 does not require any installation operations.							
Use	The product does not require special maintenance operations.							
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials							
	This product contains Plastic parts with brominated FR (4.78g) that should be separated from the stream of waste so as to optimize end-of-life treatment.							
End of life	The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website							
	http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page							
	Based on "ECO'DEEE recyclability and recoverability calculation method" Recyclability potential: 37% (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).							

Environmental impacts

Reference life time	20 years						
Product category	Passive products - non-continuous operation						
Installation elements	No special components needed						
Use scenario	The product is in ON mode 30% of the time with a power use of 0.5W and in OFF mode 70% of the time with no power use, for 20 years						
Geographical representativeness	Europe						
Technological representativeness	Illuminated complete plastic unit with contact function. It combines simplicity of installation, flexibility, and robustness. It meets the requirements of the majority of industrial applications.						
	Manufacturing	Installation	Use	End of life			
Energy model used	Energy model used: France	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27			

ENVPEP1710010EN_V1 11/2017

Compulsory indicators		Complete III	uminated Plastic	Button and Sw	ritch - XB5AW	/34B5	
mpact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	3,05E-04	3,04E-04	0*	0*	1,12E-06	0*
Contribution to the soil and water acidification	kg SO₂ eq	5,61E-02	2,29E-03	3,30E-05	0*	5,37E-02	1,48E-05
Contribution to water eutrophication	kg PO ₄ 3- eq	3,72E-03	4,63E-04	7,60E-06	5,69E-07	3,24E-03	4,36E-06
Contribution to global warming	kg CO ₂ eq	1,33E+01	4,51E-01	7,23E-03	0*	1,29E+01	8,87E-03
Contribution to ozone layer depletion	kg CFC11 eq	8,77E-07	3,77E-08	0*	0*	8,39E-07	3,43E-10
Contribution to photochemical oxidation	kg C₂H₄ eq	3,12E-03	1,69E-04	2,35E-06	0*	2,95E-03	1,53E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	4,67E+01	0*	0*	0*	4,67E+01	0*
otal Primary Energy	MJ	2,65E+02	7,21E+00	1,02E-01	0*	2,57E+02	7,12E-02
100% — 90% — 90% — 60% — 60% — 40% — 30% — 20% — 10% — 90% —							
mineral the soil and water wa		ribution to (Contribution to hotochemical oxidation	Net use of freshwater		,

Optional indicators	Complete Illuminated Plastic Button and Switch - XB5AW34B5						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1,51E+02	4,79E+00	1,02E-01	0*	1,46E+02	6,51E-02
Contribution to air pollution	m³	6,01E+02	4,58E+01	3,07E-01	8,63E-02	5,54E+02	5,20E-01
Contribution to water pollution	m³	6,47E+02	1,14E+02	1,19E+00	9,22E-02	5,31E+02	6,51E-01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	8,37E-03	8,37E-03	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	3,30E+01	2,82E-01	0*	0*	3,27E+01	0*
Total use of non-renewable primary energy resources	MJ	2,32E+02	6,93E+00	1,02E-01	0*	2,24E+02	7,12E-02
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3,28E+01	1,08E-01	0*	0*	3,27E+01	0*
Use of renewable primary energy resources used as raw material	MJ	1,74E-01	1,74E-01	0*	0*	0*	0*

ENVPEP1710010EN_V1 11/2017

Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2,31E+02	6,17E+00	1,02E-01	0*	2,24E+02	7,12E-02
Use of non renewable primary energy resources used as raw material	MJ	7,56E-01	7,56E-01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	4,30E-01	3,35E-01	0*	8,54E-03	6,71E-03	7,90E-02
Non hazardous waste disposed	kg	4,82E+01	2,00E-01	0*	0*	4,80E+01	0*
Radioactive waste disposed	kg	3,22E-02	1,11E-04	0*	0*	3,21E-02	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	3,01E-02	3,83E-03	0*	8,42E-03	0*	1,79E-02
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1,63E-03	2,07E-04	0*	0*	0*	1,42E-03
Exported Energy	MJ	0,00E+00	0*	0*	0*	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.7.0, database version 2016-11.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	ENVPEP1710010_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	11/2017	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org

Independent verification of the declaration and data, in compliance with ISO 14025: 2010

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »

Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

© 2017 - Schneider Electric - All rights reserved

11/2017

ENVPEP1710010EN_V1